



Lithium Coin Cell - CR 2477

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


Technical Data Sheet • CR 2477

SPECIFICATIONS


| | |
|-------------------------|---------------------|
| Nominal Voltage | 3V |
| Jauch part number | 245788 |
| Nominal Capacity | 1000 mAh |
| Standard Load | 7.5 kΩ |
| Standard Current | 0.4 mA |
| Max. Continuous Current | 2 mA |
| Max. Pulse Current | 15 mA |
| Operating Temperature | -30°C to +70°C* |
| Weight | Approx. 8.7 gr. |
| Chemistry | Li/MnO ₂ |
| UI1642 | MH62838 |

* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DIMENSIONS

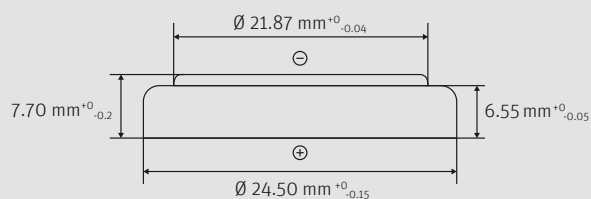


DISCHARGE CHARACTERISTICS

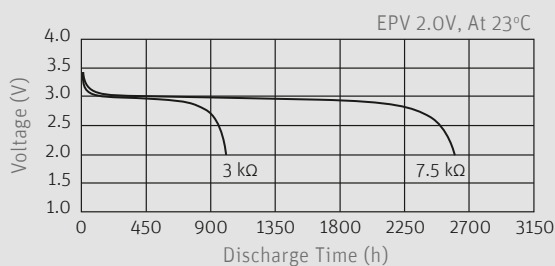


TEMPERATURE CHARACTERISTICS

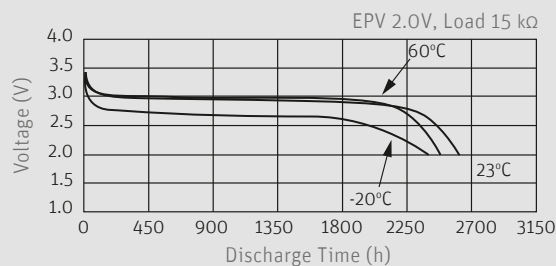

PULSE DISCHARGE CHARACTERISTICS

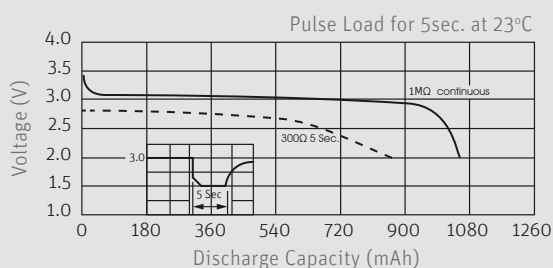

LOAD VS: CAPACITY

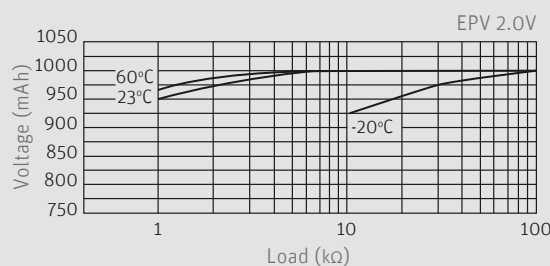

Wide assortment of mounting options, including through hole, surface mount and wire terminals.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact us for the latest information.