










Elastomer Socket for Al Chip

To verify the performance of high power artificial intelligence chip, 80+ GHz bandwidth elastomer socket can be used with heatsink/axial flow fan to remove 250+ watts of heat generation. Elastomer socket is transparent such that the performance is equivalent to direct solder version. Self inductance of elastomer is 0.1nH and the socket can be operated from -55°C to +160°C.

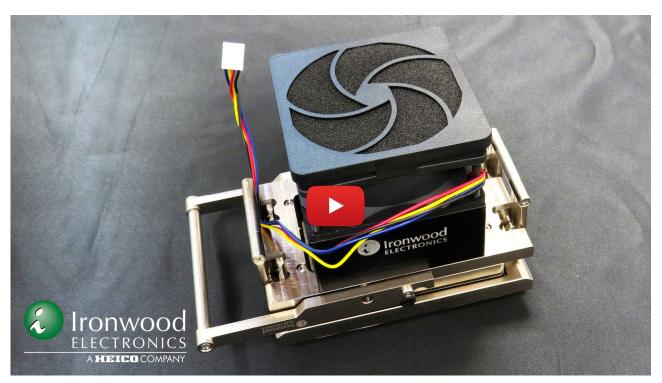



(July, 2024

B.C.E. S.r.l Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy			
Tel: (+39) 0536 811616	Fax: (+39) 0536 811500	E-mail: bce@bce.it	Web: www.bce.it