




94GHz Elastomer Socket for FCCSP78

Quickly and easily Socket your 0.5mm pitch 15x6 array, FCCSP78 packages on any application board with performance equivalent to direct solder version using high speed and low inductance elastomer that operates from -55°C to +160°C.

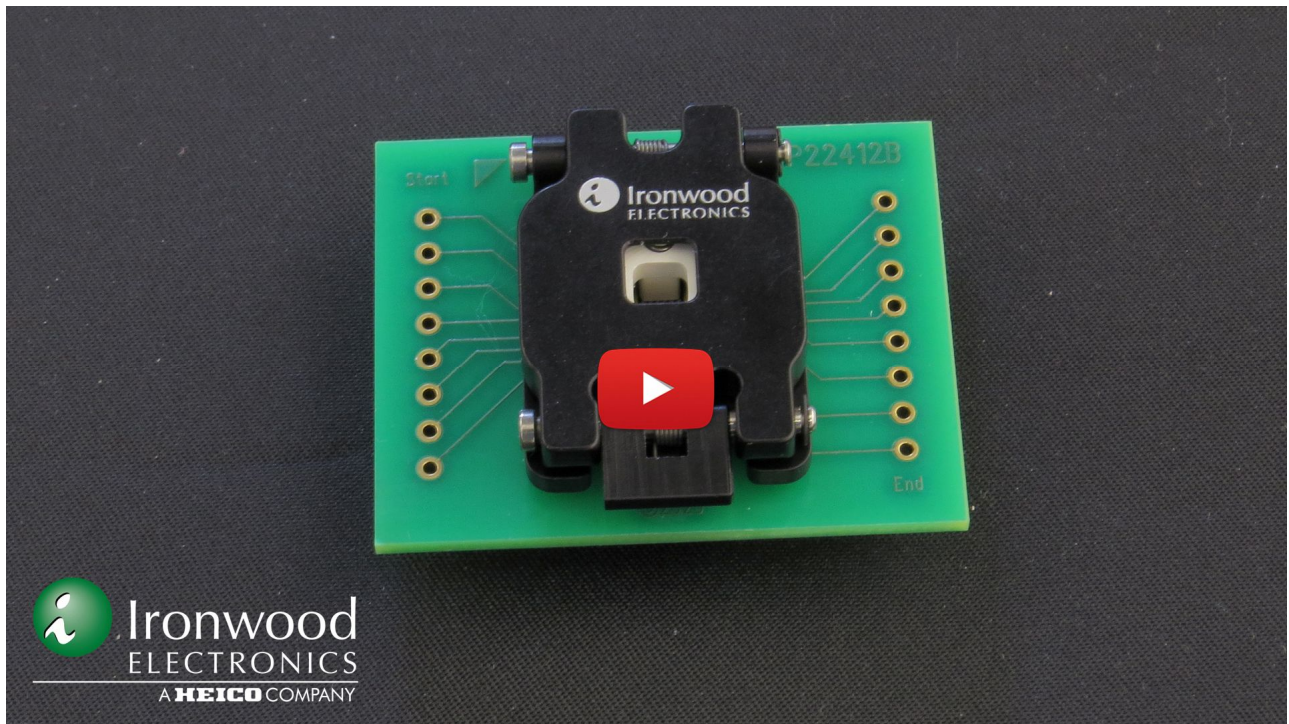

(March, 2025)

B.C.E. S.r.l. - Via Regina Pacis, 54/c - I 41049 Sassuolo (MO), Italy

Tel: (+39) 0536 811616

Fax: (+39) 0536 811500

E-mail: bce@bce.it

Web: www.bce.it